


TEMPORARY HYDRAULIC PUMP

- FOR ELEVATOR EMERGENCY
- FOR ELEVATOR ADJUSTMENT
- FOR ELEVATOR MAINTENANCE

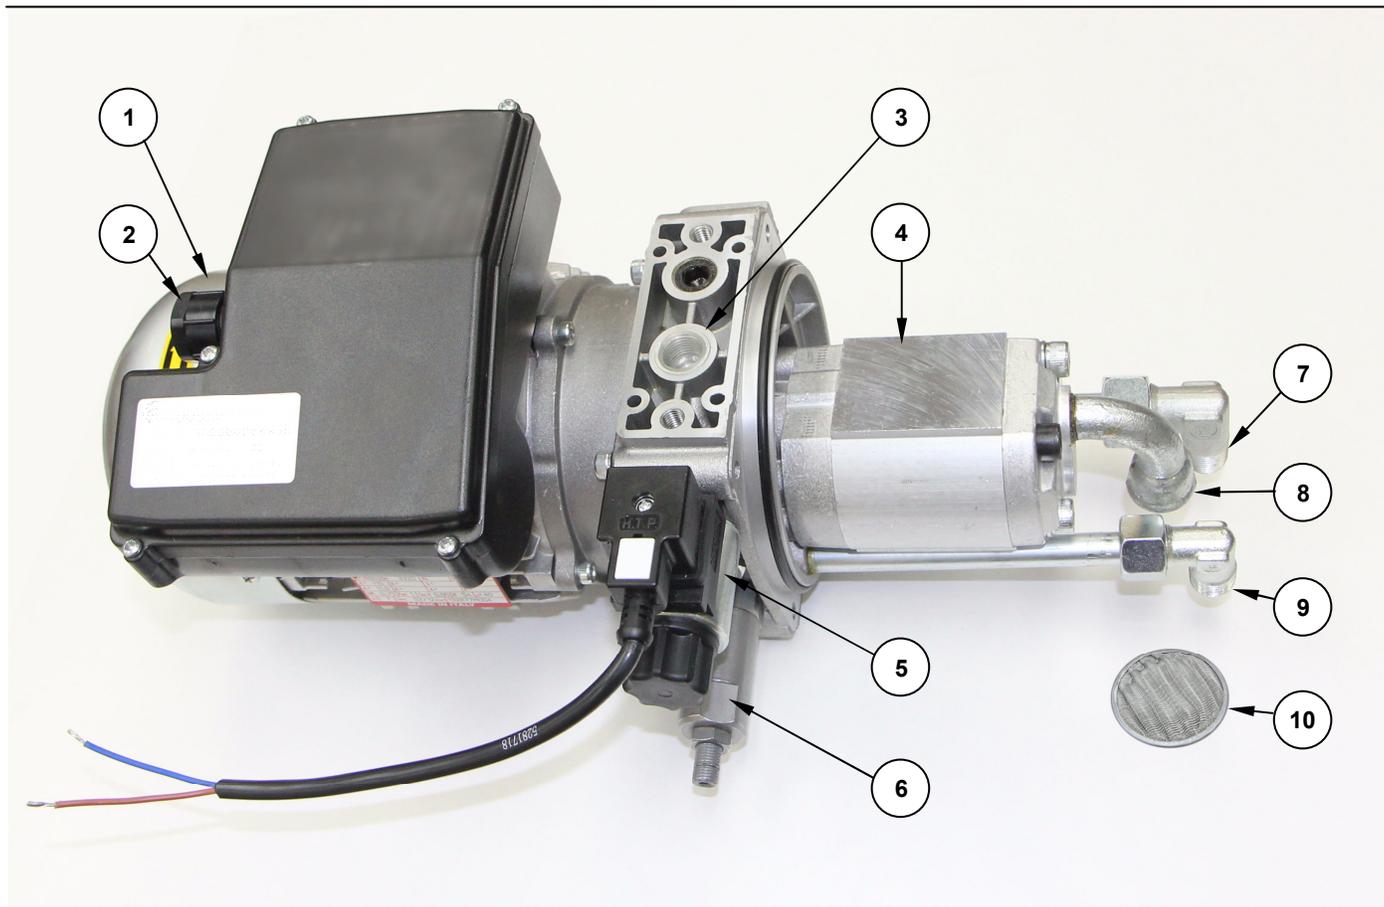

Model CEPU

1. AC MOTOR, 3485 RPM, 120 VAC, 1 PHASE, 60 HZ, 1 HP
2. MOTOR POWER CABLE CONNECTOR, LIQUID TIGHT
3. OIL OUTLET TO LOAD, 3/8"-18 NPT, FEMALE, (TO OIL LINE TO JACK)
4. GEAR PUMP, 363 PSI, 4.23 GPM
5. OIL RETURN VALVE, 7.5" CABLE, 120 VAC
6. OIL RELIEF VALVE, 72-870 PSI
7. OIL RETURN, 3/8"-18 NPT, MALE, (TO OIL TANK)
8. OIL INLET, 3/8"-19 BSPP, FEMALE, (TO OIL TANK)
9. OIL RELIEF VALVE OUTLET, 3/8"-18 NPT, MALE, (TO OIL TANK)
10. OIL INLET FILTER, INCLUDED, 90 M, 3/8"-18 NPT, FEMALE

OVERALL DIMENSIONS: 17" x 8" x 8"; WEIGHT: 25.6 LB

CUSTOM OPTIONS ARE AVAILABLE

PISTON DIAMETER	SPEED FPM
2"	26.0
3"	11.6
4"	6.5
5"	4.2
6"	2.9
7"	2.1
8"	1.7
9"	1.3
10"	1.0

**QUALITY
ELEVATOR PRODUCTS, INC.**