

# HYDRAULIC LINE ISOLATION COUPLINGS




## Isolation Couplings

Isolation couplings designed for electric isolation in hydraulic elevators to prevent electrolysis. They also reduce mechanically transmitted noise and vibration between power unit and the car. Recommended to use with muffler for maximum sound reduction.

Available with Victaulic (grooved), threaded (NPT), or combined line connections.

- Maximum working pressure 600 PSI
- Schedule 80 line connections
- Dielectric strength of 25 KV
- Meet or exceed ASME A17.1/CSA B44

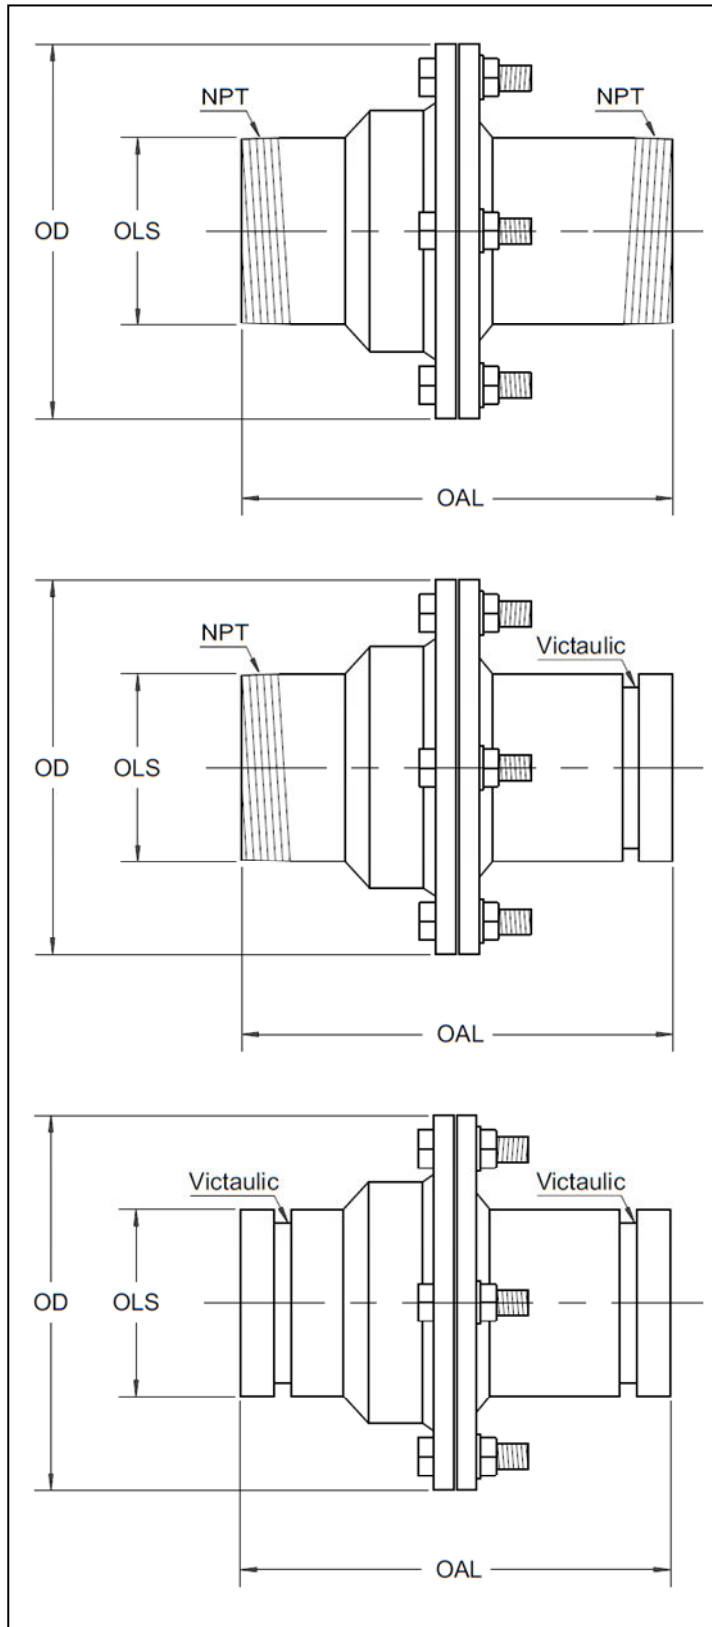

Model	Oil Line Size OLS	Inlet Type	Outlet Type	OAL*	OD*
ISC2GN	2"	Victaulic	Victaulic	6"	6.75"
ISC2GTN	2"	Victaulic	NPT	6"	6.75"
ISC2T	2"	NPT	NPT	6"	6.75"
ISC25GN	2-1/2"	Victaulic	Victaulic	8"	8"
ISC25GT	2-1/2"	Victaulic	NPT	6.3"	7.6"
ISC25T	2-1/2"	NPT	NPT	7"	7.7"
ISC3T	3"	NPT	NPT	8.1"	8"
ISC3GN	3"	Victaulic	Victaulic	8"	8"
ISC4G	4"	Victaulic	Victaulic	8.4"	9.5"

\* Typical dimensions  
Other Models are available. Please inquire.

**QUALITY  
ELEVATOR PRODUCTS, INC.**

Isolation\_Couplings\_090320

Quality Elevator Products, Inc. • 7760 Merrimac Ave. Niles IL 60714 • Phone: (847) 581-0085 • Fax: (847) 581-0095 • www.qualityelev.com

© Quality Elevator Products, Inc. 2020